

# Trailing Shoe

Farmer Specification Slurry Application Unit




Watch Video

The MAJOR farmer specification Trailing Shoe sits close to the rear of the tanker for better weight distribution and is designed to fit any size tanker.

This unit is easily mounted onto the back door (30") without welding or fabricating, and can be used with the existing splashplate in place. Slurry enters the macerator through the 4" Bauer coupling and is distributed through the 40mm outlets.

The macerator is fitted with an integrated foreign body separator to prevent debris from blocking the outlets. It also contains self sharpening and self adjusting blades meaning reduced maintenance times. A large capacity stone trap is located under the macerator which collects debris. It can be cleaned out easily, without the use of tools.

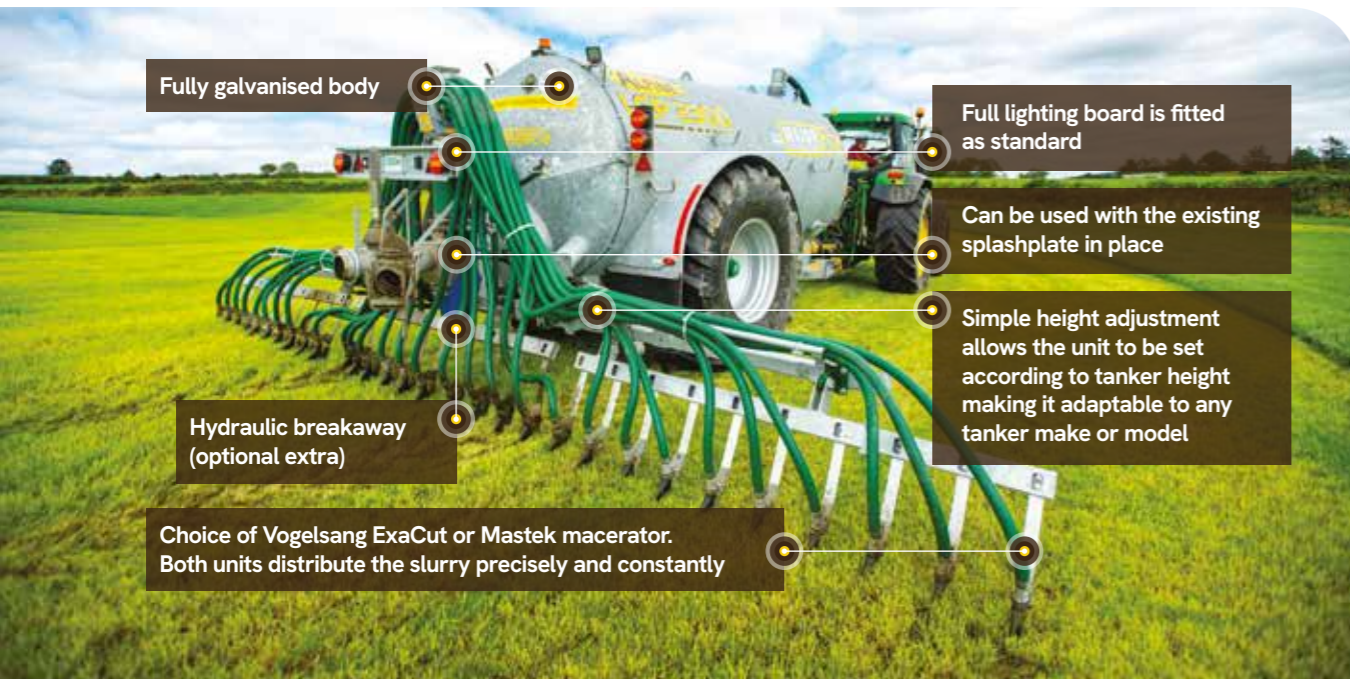

Fully galvanised body

Full lighting board is fitted as standard

Can be used with the existing splashplate in place

Simple height adjustment allows the unit to be set according to tanker height making it adaptable to any tanker make or model

Hydraulic breakaway (optional extra)

Choice of Vogelsang ExaCut or Mastek macerator. Both units distribute the slurry precisely and constantly

The high tensile springs use the high carbon steel coulters to split the grass - allowing the slurry to run on the ground. The spring steel bars on the frame allow the outlets to follow the ground contours.



MODEL	MJ81-750	MJ81-960
Working width	9.6 m (31' 6")	10.1m (33' 2")
Overall width	9.8m (33' 2")	10.25m (33' 8")
Transport width	2.4m (8')	2.2m (7'2")
Transport height	2.6m (8' 10")	2.4m (7'11")
Single /Double fold	Double	Double
Wing Pivot	180° & 85°	100°
No. of Outlets	38	40
Weight	870kg	900kg
Macerator	Mastek or Vogelsang	Mastek, Vogelsang or AOL
Hydraulic services required	2 double acting hydraulic spools	
Spacing	25cm	25cm
Bar/Spring system	Bar	Bar
Rear fill	Yes	Yes
Note	Can be self retro fitted	Factory fitted. For 2400 gallon tankers and up


# Trailing Shoe

Contractor Specification Slurry Application Unit

The MAJOR MJTS6430 Slurry Applicator covers an area of 6.4m with 32 outlets.

Slurry enters the Vogelsang macerator through the 4" Bauer coupling and is distributed through the 40mm outlets. A large capacity sump is located under the macerator which collects debris. It can be cleaned out easily, without the use of tools.

The 40mm distribution pipes are finished off with couplings to allow simple maintenance of the rubber nozzles. The high tensile springs use the high carbon steel coulters to split the grass allowing the slurry to run on the ground. Pneumatic wheels are fitted as standard letting the frame follow the ground contours.

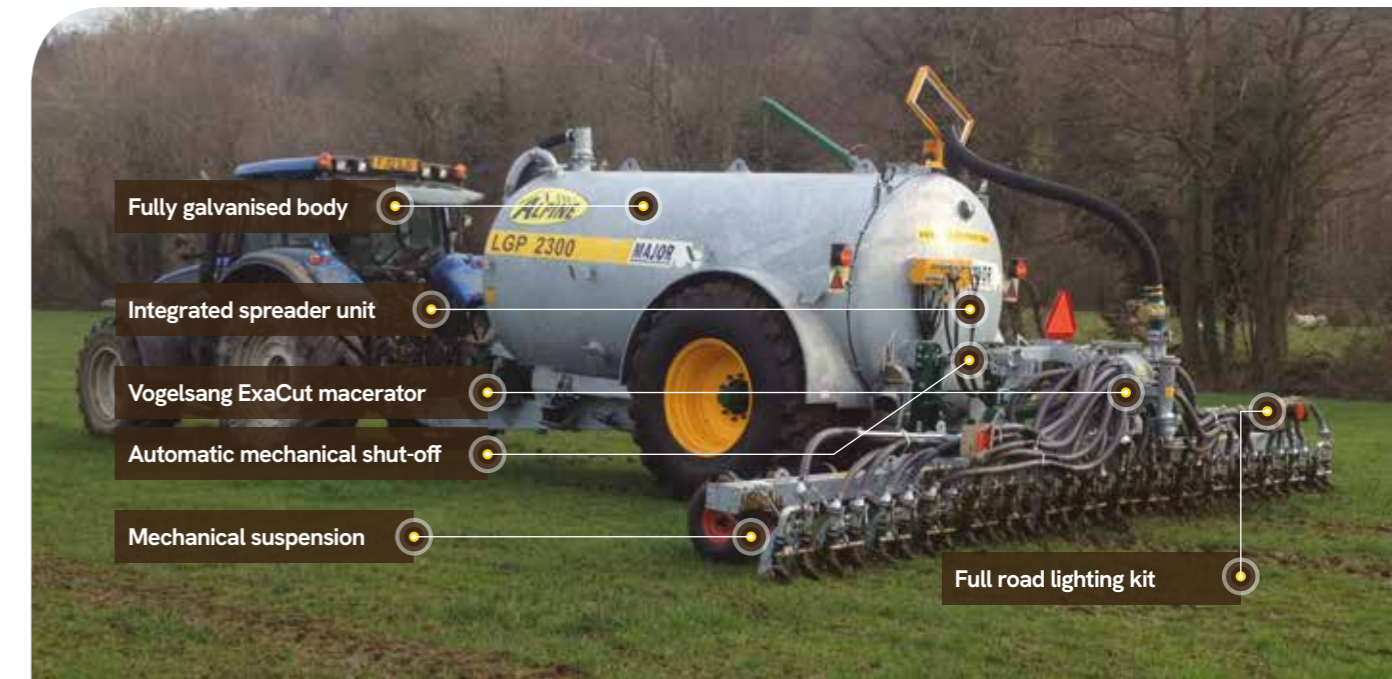

Fully galvanised body

Integrated spreader unit

Vogelsang ExaCut macerator

Automatic mechanical shut-off

Mechanical suspension

Full road lighting kit



The ExaCut Macerator is fitted with an integrated foreign body separator to prevent debris from blocking the outlets. It also contains self sharpening and self adjusting blades meaning reduced maintenance times.

MODEL	MJTS6430
Working width	6.4m (20' 11")
Overall width	6.6m (21')
Transport width	2.95m (9' 8")
Transport height	3.42m (11' 3")
Single /Double fold	Single
Wing Pivot	90°
No. of Outlets	32
Weight	1026Kg
Macerator	Vogelsang ExaCut
Hydraulic services required	2 double acting hydraulic spools
Spacing	22cm
Bar/Spring system	Spring tine
Rear fill	No
Back Door	n/a
Note	Factory fitted