




# Manure Spreader



- Heavy duty EN16 towing eye
- Heavy duty monocoque body construction
- Heavy duty 150mm beam, 10 stud axle with hydraulic brakes (air brakes optional)
- Ratchet style handbrake
- Variable speed floor chains (electric control optional)
- 4 stress relieved floor chains (14x50)
- Floor chains protected by a cross-line pressure relief valve
- Galvanised quick attach floor slats (no welding to the chain)
- Galvanised rear vertical auger frame
- Dynamically balanced twin vertical rotors with reversible Hardox blades
- 10mm plate auger flights
- Remote greasing for drive shaft & auger bearings
- Full R.T.A LED lights c/w automatic covers for lights when spreading
- Hydraulically operated slurry door
- Wide angle PTO shaft
- Slip clutch and overrun clutch at gearbox input shaft
- Galvanised PTO shaft stand
- Galvanised drawbar boot
- Galvanised mudguards
- Drawbar boot storage
- Reflective tape
- Two pack paint finish



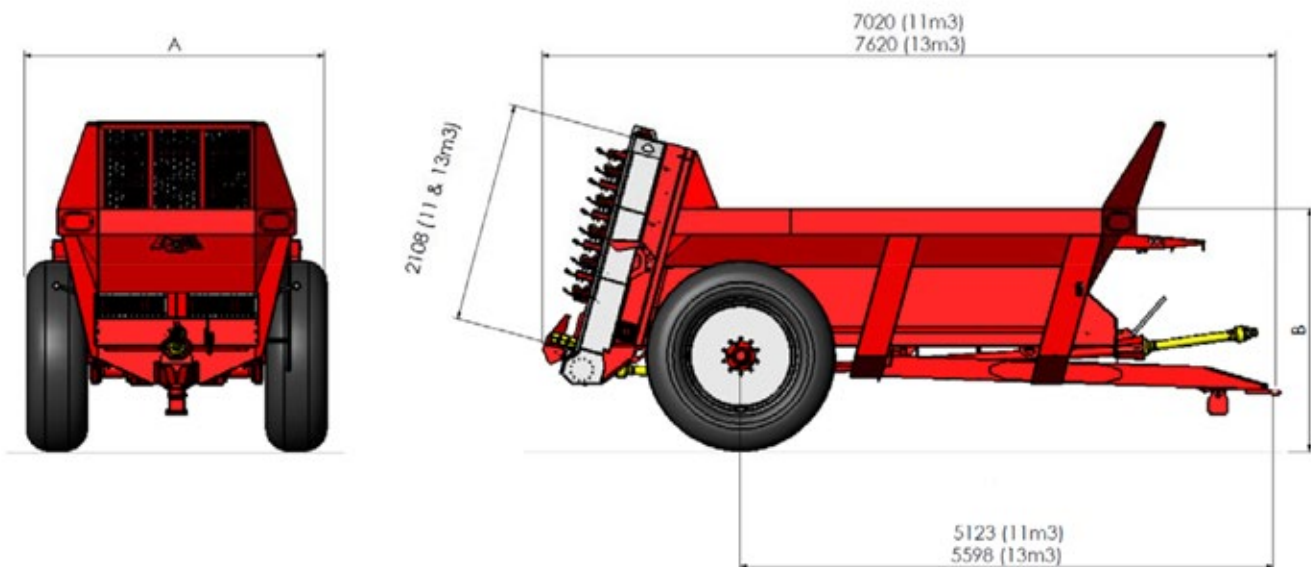

Model	11m3	13m3
Rated load carrying capacity	10000 kg	12000 kg
Capacity (heaped)	11m3	13m3
Spread width	Up to 16m	Up to 16m
Axle Beam Size	150mm	150mm
Brake Size	420 x 180	420 x 180
A (Width)	2877mm (9' 5 1/4")	2990mm (9' 9 3/4")
Tyre Size	580/70 R38 (Std) 650/75 R32 (option)*	650/75R32 (Std)
Body Size L x W x H (internal)	4750 x 1500 x 1110mm	5350 x 1500 x 1110mm
B (Side Loading Height)	2200mm	2200mm
Floor Drive	Hydraulic	Hydraulic
Floor Drive control	Hydraulic Variable c/w reverse Electric Option	Hydraulic Variable c/w reverse Electric Option
Floor Chain Size	14 x 50mm	14 x 50mm
No of Floor Chains	4	4
PTO input speed	1000rpm	1000rpm
Un-laden Weight	Approx. 5150kg	Approx. 5500kg



Ratchet Style Handbrake



Front Reflective Tape



Document Holder



Access Ladder



Floor Drive Gearbox c/w Pressure Relief Valve to Protect Chains



Spare Shear Bolts



Vertical Rotors c/w Hardox Blades, Number Plate Holder



Automatic Light Covers



Floor Chains & Slats



Slurry Door



Front Muck Guard



Galvanised Mudguards



Remote Greasing for Shaft & Auger Bearings



Floor Speed Control Valve



Hydraulic Hose Storage



Drawbar boot, PTO shaft stand, Bolt On 50mm Agri Towing Eye



Jacking Point



Reflective Tape on Side & Rear



Powerbrake – Handbrake & Break Away System



Floor Speed Control Valve – Electric Version c/w In Cab Controller



NC Cable Break Away System



Air Brakes, Wheel Chocks




Galvanised Extension Sides



650/75R32 BKT Wheels on 11m3

# Notes

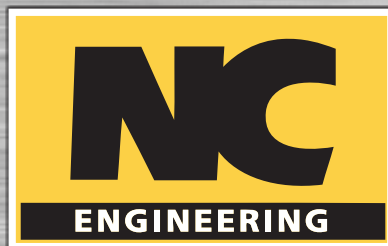

## Optional Extras

---

Dual Air/Hydraulic Brakes  
Air Only Brakes  
Powerbrake in lieu of Standard Handbrake  
NC Cable Break Away  
Electric Floor Speed Control  
Auto Reset (Slip Clutch) Overload PTO Shaft in lieu of Wide Angle PTO Shaft  
LED Control Kit  
Screw Jack (Commercial Type)

Alternative Wheel Colour  
All Other Colours  
Hydraulic Folding Rear Light Cover  
Galvanised Extension Sides  
Rear Door Height Indicator  
650/75R32 BKT Wheels on 11m3  
Alliance 650/75R32 Wheels in lieu of BKT 650/75R32



Revision 05- January 2026

In accordance with our policy of continued development we reserve the right to alter specification and design without notice.



NC Engineering (Hamiltonsbawn) Ltd  
2 Killyrudden Road  
Hamiltonsbawn  
Co. Armagh  
Northern Ireland  
BT61 9SF

Tel: 028 38 871970  
Fax: 028 38 870362

[www.nc-engineering.com](http://www.nc-engineering.com)

